


IN THE CLAIMS:

1. (Currently Amended) A curable elastomeric nanocomposite comprising clay and a nonhalogenated elastomer having a viscosity average molecular weight in the range of 200,000 to 2,000,000, the nonhalogenated elastomer comprising C₂ to C₁₀ olefin derived units, styrenic derived units, and substituted styrenic derived units, wherein the styrenic derived units are present from 1 to 15 wt% of the elastomer; wherein the elastomer also comprises functionalized monomer units having functional groups pendant to the elastomer, E, selected from the following:

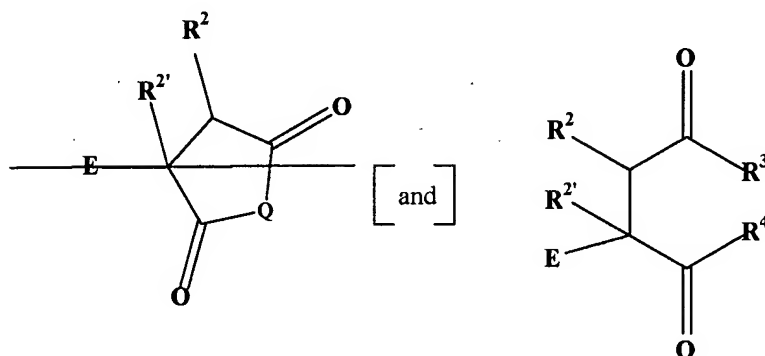

wherein R^2 and $R^{2'}$ are the same or different and are selected from hydrogen, C₁ to C₂₀ alkyls, alkenyls or aryls, substituted C₁ to C₂₀ alkyls, alkenyls or aryls, hydroxyl and C₁ to C₂₀ alkoxys; and wherein R³ and R⁴ are the same or different and selected from -OR⁵ and -NHR⁵, wherein R⁵ is selected from hydrogen, C₁ to C₂₀ alkyls, alkenyls or aryls, substituted C₁ to C₂₀ alkyls, alkenyls or aryls.

Deleted: Q is selected from O and an NR¹ group, wherein R¹ is selected from hydrogen, C₁ to C₂₀ alkyls, alkenyls or aryls, substituted C₁ to C₂₀ alkyls, alkenyls or aryls;

Deleted: is defined as R¹ above

2. - 4. (Cancelled)

5. (Original) The nanocomposite of Claim 1, wherein the olefin is selected from one or more of isobutylene, isobutene, 2-methyl-1-butene, 3-methyl-

1-butene, 2-methyl-2-butene, and 4-methyl-1-pentene, ethylene, propene,
1-butene, 1-hexene, and 1-octene.

6. – 7. (Cancelled)

8. (Original) The nanocomposite of Claim 1, wherein the elastomer also comprises isoolefin derived units and *p*-methylstyrene derived units.

9. (Cancelled)

10. (Original) The nanocomposite of Claim 1, wherein the functionalized units are present on the elastomer from 0.01 wt% to 15 wt% of the elastomer.

11. (Original) The nanocomposite of Claim 1, wherein the clay has been treated with an exfoliating agent to form an exfoliated clay.

12. (Cancelled)

13. (Original) The nanocomposite of Claim 1, wherein the clay is present from 0.1 wt% to 50 wt% of the nanocomposite.

14 - 15. (Cancelled)


16. (Original) The nanocomposite of Claim 1, also comprising a filler selected from carbon black, modified carbon black, silica, precipitated silica, and blends thereof.

17 - 18. (Cancelled)

19. (Original) The nanocomposite of Claim 1, also comprising a secondary rubber selected from natural rubber, polybutadiene rubber, nitrile rubber, silicon rubber, polyisoprene rubber, poly(styrene-*co*-butadiene) rubber,

poly(isoprene-*co*-butadiene) rubber, styrene-isoprene-butadiene rubber, ethylene-propylene rubber, brominated butyl rubber, chlorinated butyl rubber, halogenated isoprene, halogenated isobutylene copolymers, polychloroprene, star-branched polyisobutylene rubber, star-branched brominated butyl rubber, poly(isobutylene-*co*-isoprene) rubber, halogenated poly(isobutylene-*co*-*p*-methylstyrene), ethylene-propylene rubber and mixtures thereof.

20. (Previously Presented) An article comprising the nanocomposite of Claim 1, the article being a tire innerliner or an innertube.
21. (Cancelled)
22. (Previously Presented) A method of forming an elastomeric nanocomposite comprising contacting:
 - (a) a non-halogenated elastomer having a viscosity average molecular weight in the range of 200,000 to 2,000,000, wherein the elastomer comprises C₂ to C₁₀ olefin derived units, styrenic derived units, and substituted styrenic derived units, wherein the styrenic derived units are present in an amount of 1 to 15 wt% of the elastomer;
 - (b) at least one functionalizing compound selected from

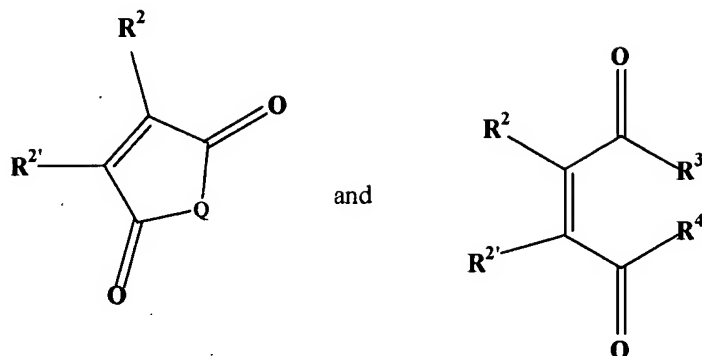

wherein Q is selected from O and an NR¹ group, wherein R¹ is selected from hydrogen, C₁ to C₂₀ alkyls, alkenyls or aryls, substituted C₁ to C₂₀ alkyls, alkenyls or aryls; R² and R^{2'} are the same or different and are selected from hydrogen, C₁ to C₂₀ alkyls, alkenyls or aryls, substituted C₁ to C₂₀ alkyls, alkenyls or aryls, hydroxyl and C₁ to C₂₀ alkoxys; and wherein R³ and R⁴ are the same or different and are selected from -OR⁵ and -NHR⁵, wherein R⁵ is defined as R¹ above ;

(c) at least one peroxide; and

(d) clay.

23. (Previously Presented) The method of Claim 22, wherein the method of contacting is selected from one of the following methods: 1) the elastomer is first contacted with the functionalizing compound, followed by contacting with the clay, 2) the elastomer, clay, and functionalizing compound are contacted simultaneously, 3) the elastomer and functionalizing compound are solubilized in a diluent, and 4) the elastomer and the functionalizing compound are melt blended.

24 - 26. (Cancelled)

27. (Original) The method of Claim 22, wherein the at least one peroxide is selected from diacyl peroxides, ketone peroxides, peroxyesters, peroxydicarbonates, dialkyl peroxides, hydroperoxides, and peroxyketals.

28. (Cancelled)

29. (Original) The method of Claim 22, wherein the functionalizing compound is selected from monomethyl maleate, dimethyl maleate, diethyl maleate, diphenyl maleate, dibutyl fumarate, maleimide, citraconic anhydride, itaconic anhydride, maleic anhydride, N,N'-phenylenedimaleimide, N-methylmaleimide, N-phenylmaleimide, maleic acid, itaconic acid, and the metal carboxylic derivatives thereof.

30. (Original) The method of Claim 22, wherein the elastomer also comprises monomer units selected from styrenic derived units and substituted styrenic derived units.

31. (Cancelled)

32. (Original) The method of Claim 30, wherein the styrene derived units are present from 1 to 15 wt% of the elastomer.

33. (Cancelled)

34. (Original) The method of Claim 22, wherein the elastomer also comprises isoolefin derived units and *p*-methylstyrene derived units.

35. (Original) The method of Claim 22, wherein the elastomer is selected from natural rubber, poly(isobutylene-*co*-isoprene), polybutadiene, poly(styrene-*co*-butadiene) rubber, poly(isoprene-*co*-butadiene),

poly(styrene-isoprene-butadiene), star-branched polyisobutylene rubber, poly(isobutylene-*co*-styrene), poly(isobutylene-*co-p*-methylstyrene), ethylene-propylene rubber and mixtures thereof.

36. (Original) The method of Claim 22, wherein the elastomer is functionalized by contacting with the functionalizing compound, wherein the functional groups are present on the elastomer from 0.01 wt% to 15 wt% of the elastomer.
37. (Original) The method of Claim 22, wherein the clay has been treated with an exfoliating agent to form an exfoliated clay.
38. (Cancelled)
39. (Original) The method of Claim 22, wherein the clay is present from 0.1 wt% to 50 wt% of the nanocomposite.
40. - 41. (Cancelled)
42. (Original) The method of Claim 22, also comprising a filler selected from carbon black, modified carbon black, silica, precipitated silica, and blends thereof.
- 43 - 44. (Cancelled)
45. (Original) The method of Claim 22, also comprising a secondary rubber selected from natural rubber, polybutadiene rubber, nitrile rubber, silicon rubber, polyisoprene rubber, poly(styrene-*co*-butadiene) rubber, poly(isoprene-*co*-butadiene) rubber, styrene-isoprene-butadiene rubber, ethylene-propylene rubber, brominated butyl rubber, chlorinated butyl rubber, halogenated isoprene, halogenated isobutylene copolymers, polychloroprene, star-branched polyisobutylene rubber, star-branched

brominated butyl rubber, poly(isobutylene-*co*-isoprene) rubber;
halogenated poly(isobutylene-*co*-*p*-methylstyrene) and mixtures thereof.

46 - 71. (Cancelled)

72. (Currently Amended) A curable elastomeric nanocomposite comprising clay and nonhalogenated elastomer having a viscosity average molecular weight in the range of 200,000 to 2,000,000, the nonhalogenated elastomer comprising isobutylene, wherein the elastomer also comprises functionalized styrenic monomer units having functional groups pendant to the elastomer, the functional groups being selected from the group consisting of dimethyl maleate, diethyl maleate, diphenyl maleate, and dibutyl fumarate.

Deleted: citraconic anhydride, and itaconic anhydride

73. (Previously Presented) The nanocomposite of claim 72 wherein the elastomer comprises *p*-methylstyrene derived units.

74. (Previously Presented) The nanocomposite of Claim 72, wherein the functionalized units are present on the elastomer from 0.01 wt% to 15 wt% of the elastomer.

75. (Previously Presented) The nanocomposite of Claim 72, wherein the clay has been treated with an exfoliating agent to form an exfoliated clay.

76. (Previously Presented) The nanocomposite of Claim 72, wherein the clay is present from 0.1 wt% to 50 wt% of the nanocomposite.